

Защитные автоматические выключатели QF(26)L Технические характеристики



Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54

Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)22948 -12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)



Dual Mount
1 pole



Dual Mount
2 pole



Dual Mount
3 + N

Features

- AC circuit breaker
- Hydraulic-magnetic technology
- 100% rating capability, independent of ambient temperature
- One, two, three pole, 1+N and 3+N (VDE)
- VC 8036 compliant (SANS 556-1)
- VDE, EAC and CCC approved, CE certified
- Ratings 5 to 63 A (subject to certification)
- Precision tripping characteristics
- Trip indication with mid-trip position
- Reset immediately after overload
- Dual mount product in black shells
- Suitable to use for electrical isolation
- Box terminals suitable for cables up to 50 mm²

Optional Accessories

- Handle lock
- Surface mounting clips
- Busbar
- Escutcheon blank
- Safety blank

Applications

- AC branch circuit protection (IEC / EN 60947-2)
- Telecom / datacom equipment
- Lighting control
- UPS equipment
- Alternative energy equipment
- Mobile power generation equipment
- Railway signalling equipment
- Residential equipment
- Industrial equipment

QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)

Technical Data

Product Type	Circuit Breaker				
Approvals	VC 8036 (SANS 556-1)				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240V AC		415V AC		
Minimum Current Rating	5 A				
Maximum Current Rating	63 A				
Specific Ratings (Verify Certification)	5, 10, 15, 16, 20, 25, 30, 35, 40, 45, 50, 63 A				
Interrupting Capacity	5 kA				

Product Type	Circuit Breaker				
Approvals	IEC / EN 60947-2, VDE, CE, EAC				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240V AC		415V AC		
Minimum Current Rating	5 A				
Maximum Current Rating	63 A				
Specific Ratings (Verify Certification)	5, 10, 15, 16, 20, 25, 30, 35, 40, 45, 50, 63 A				
Interrupting Capacity	6 kA				

Product Type	Circuit Breaker				
Approvals	CCC				
Number of Poles	1	2 (1+N)	2	3	4 (3+N)
Operating Voltages	240V AC		415V AC		
Minimum Current Rating	5 A				
Maximum Current Rating	63 A				
Specific Ratings (Verify Certification)	5, 10, 15, 16, 20, 25, 30, 35, 40, 45, 50, 63 A				
Interrupting Capacity	6 kA				

Product Type	QF(26)LR
Operating Temperature Range	-40 °C to +85 °C
Mounting Options	Dual mounting (DIN & Mini), surface mount
Time Delay Curves	1, 2
Endurance	10000 operations - 1500 electrical at rated current and voltage (IEC 60947-2)
Dielectric Strength	1480V (single pole) / 1830V (multi pole), 50 Hz for one minute after testing
Weight	200 g per pole (unpacked)
Humidity	35 to 85% relative
Altitude	Certification tests done at altitude ≈ 2000 metres. Will operate at higher altitudes.
Shock	50 G to MIL-STD-202G, test method 213B, test condition 1
Vibration	10 G to MIL-STD-202G test method 204D, test condition A
Flammability	I3 - Ignition does not persist at 850 °C after glow wire is withdrawn with an oxygen index of ≥ 28
Toxicity	F1 - Smoke index of ≤ 20 which determines the fume class
Pollution Degree	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

Breaker QF	Wire Size mm ² (IEC)	Torque (IEC)	Comments
1 Pole to 4 Pole	1 - 50 mm ²	4 Nm	Pozidriv #2 Combi head

QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)

Ordering Information


Example Code: QF----3(26)-DM-2-125A-----

Group	1	2	3	4	5	6	7	8	9	10	11
Requirement	QF Frame	Switch / Neutral	Not applicable	Triple pole	26 mm module width	Dual Mount	Medium delay curve 2	Current Rating 125 A	Future use	Shunt Trip	Future use
Long Code	QF	-	-	3	(26)	DM	2	125A	-	-	-

Group 1: Frame Type	Code	Description	Comments	
	QF	26 mm wide miniature circuit breaker		
Group 2: Switch/Neutral	Code	Description	Comments	
	-	Not applicable	Overload poles do not have any further coding	
	S	Switch	Green handle	
	N	Neutral	Green handle	
Group 3: Auxiliary	Code	Description	Comments	
	-	Not applicable		
Group 4: No of Poles	Code	Description	Comments	
	1	Single pole		
	2	Double pole	2 pole or 1+N	
	3	Triple pole		
	4	Four pole	4 pole or 3+N	
Group 5: Module Width	Code	Description	Comments	
	(26)	26 mm module width	26 mm per pole	
Group 6: Mounting	Code	Description	Comments	
	DM	Dual mount	Dual mount supplied in black body only - 57 mm escutcheon	
Group 7: Time Delays	Code	Description	Instantaneous Trip Point (x In)	Comments
	1	Long time delay, high instantaneous trip	10 – 20	Orange handle
	2	Medium time delay	5 – 10	White handle
Group 8: Current Ratings	Code / Description		Comments	
	70, 80, 90, 100, 125 A			
Group 9:	Code	For future use (-)		
Group 10: Shunt Trip	Code	Description	Comments	
	-	Not applicable	Use this code if no shunt trip is used	
Group 11	Code	For future use (-)		


QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)

Time Delay Curves

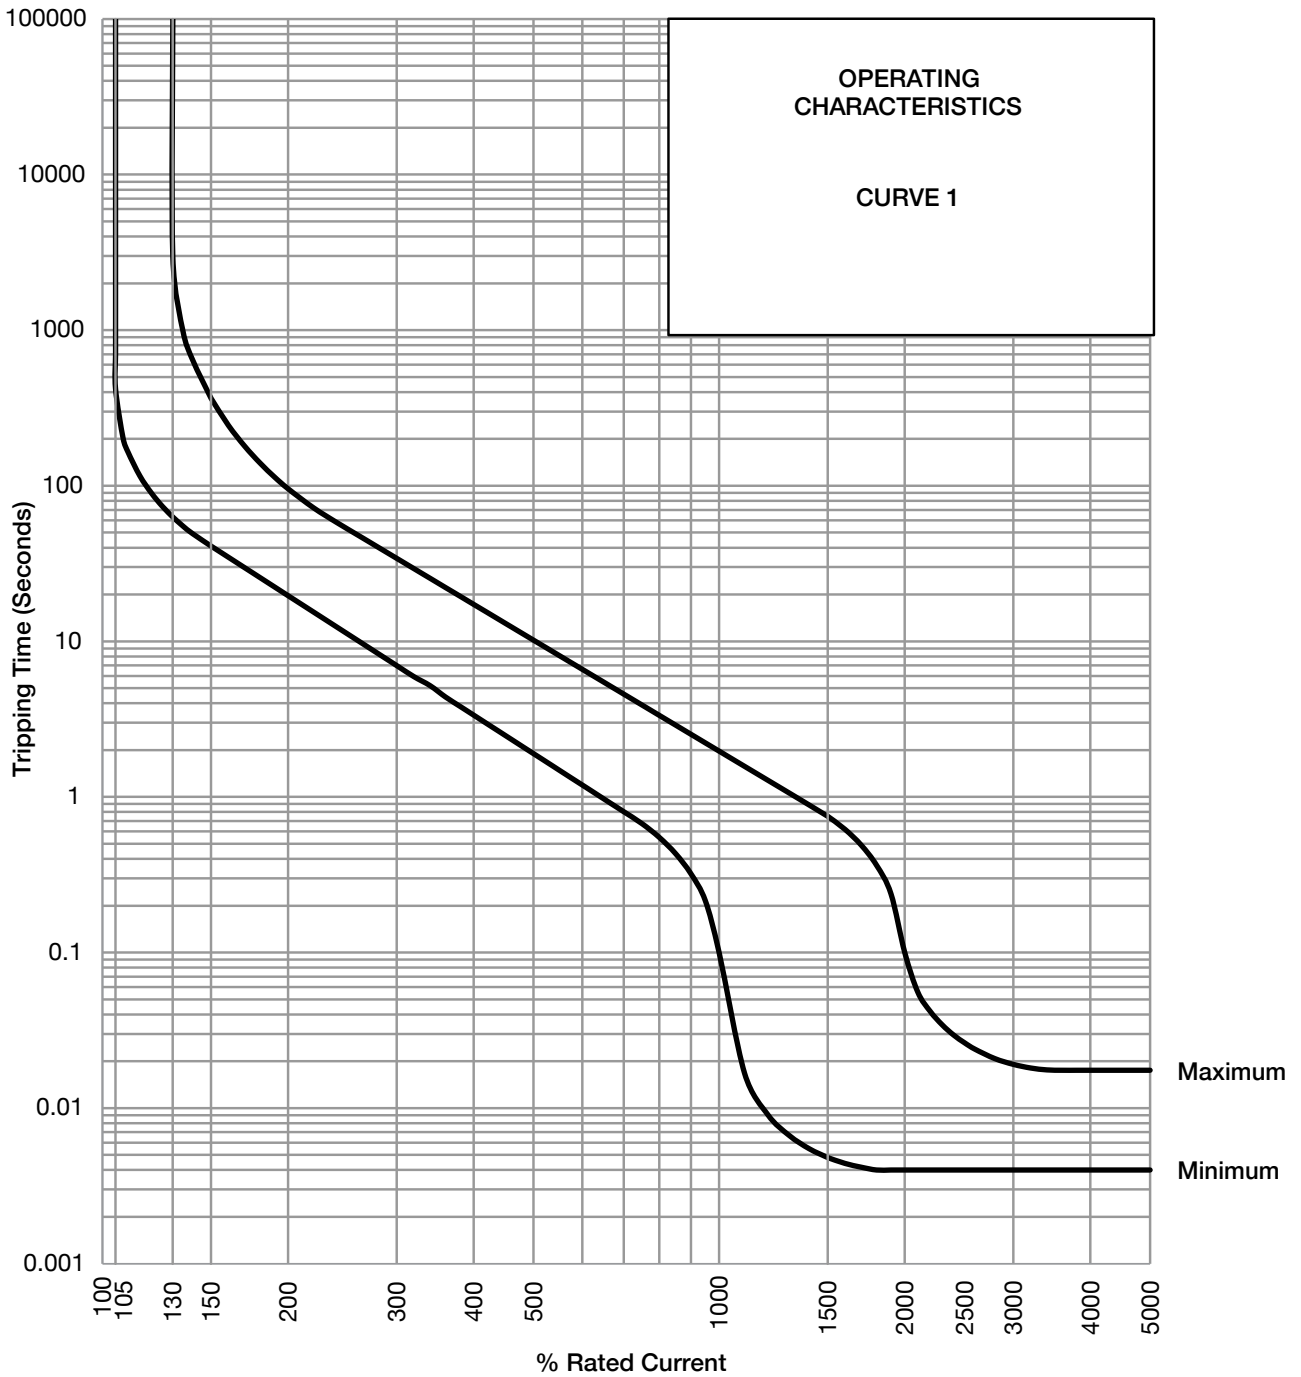

QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)


Time Delay Curves

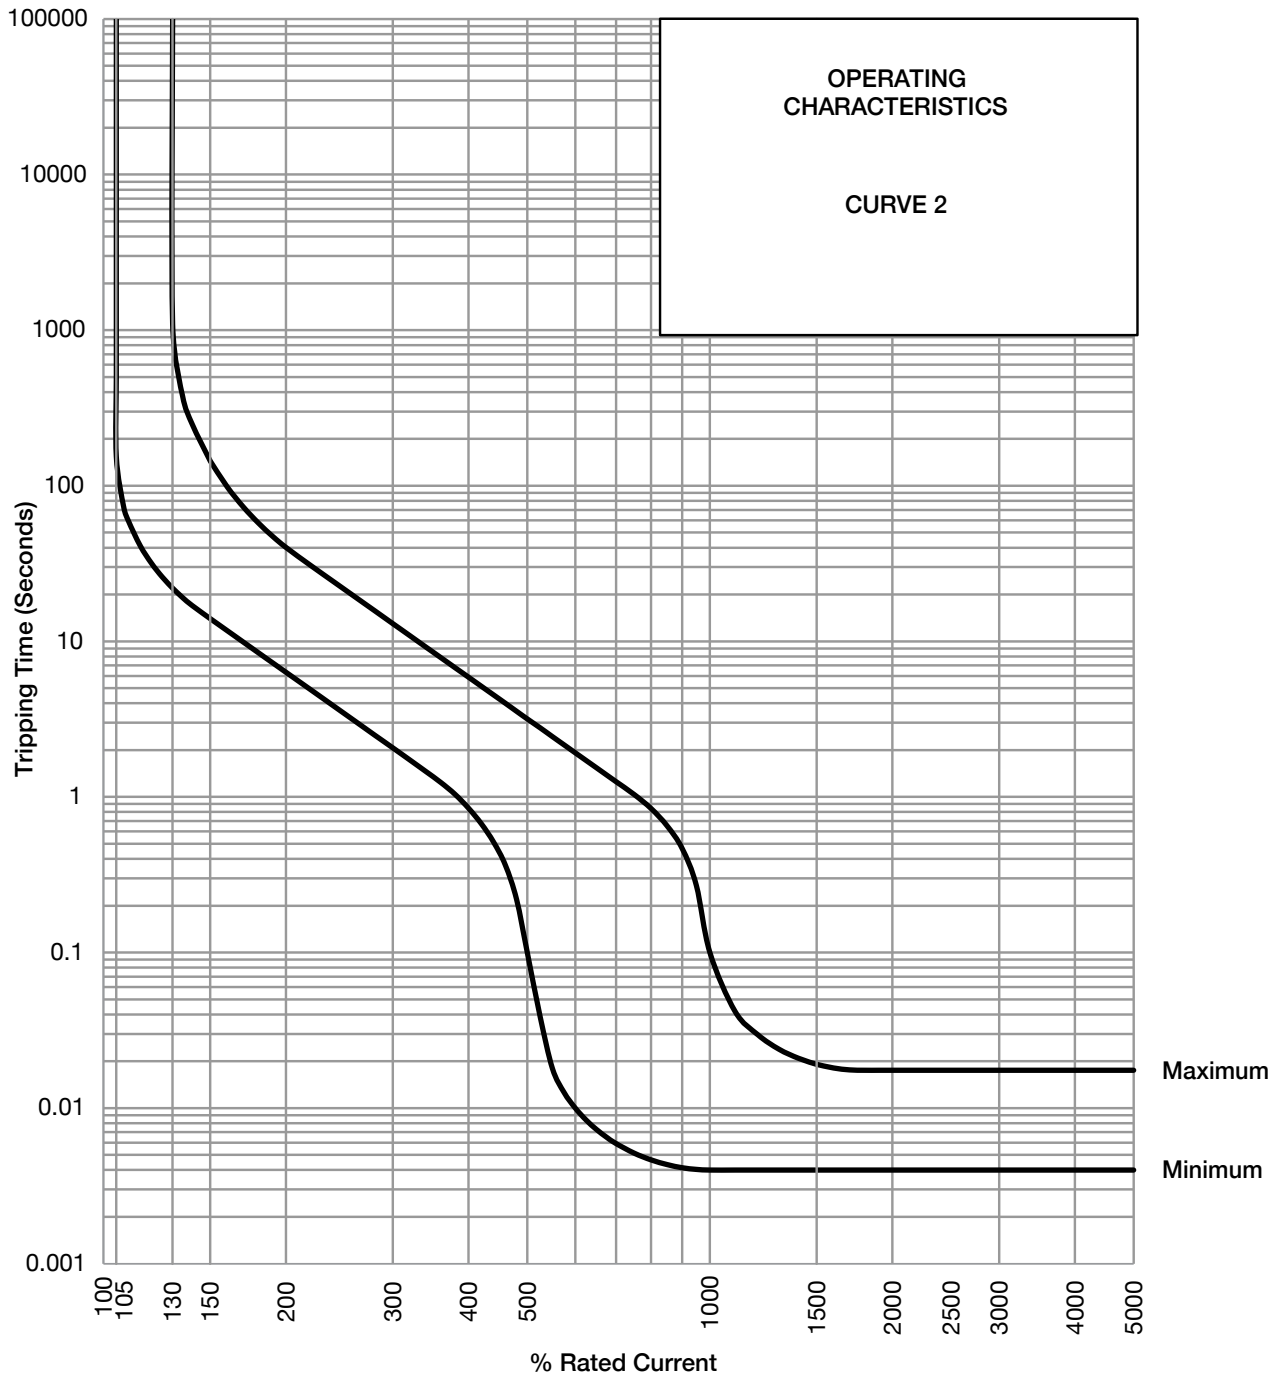


* The published time delay curves are generated at 30°C ambient temperature with the Circuit Breaker mounted in the up-right position. The “must hold”, “must trip” and “instantaneous trip” current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.

QF(26) - Series Miniature Circuit Breakers - Low Rating (5 - 63 A)

Internal Impedance vs Current Rating

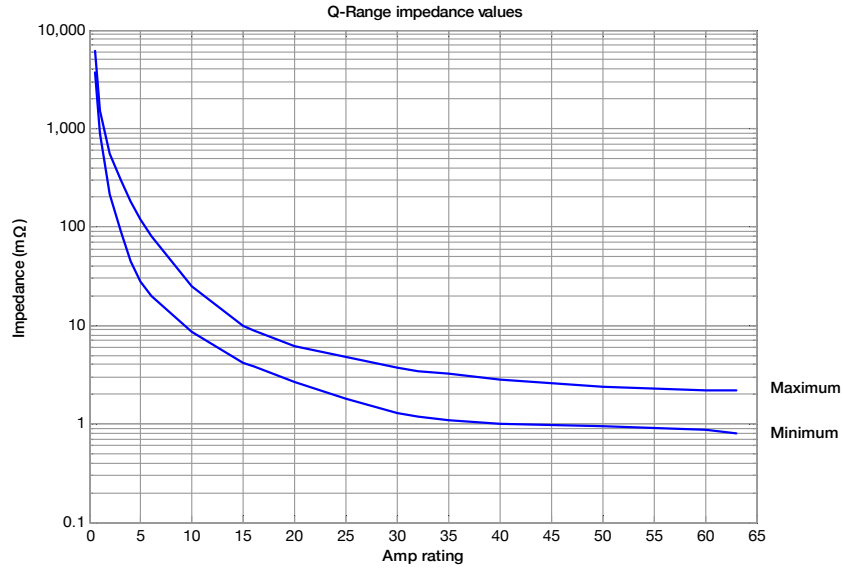

Outline Dimensions: Dual Mount

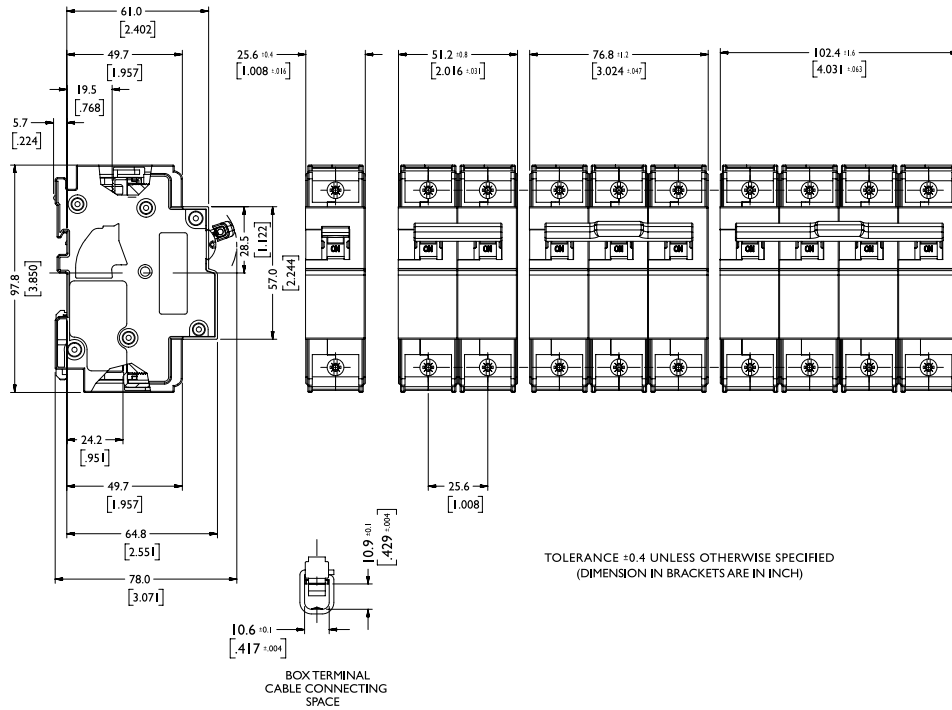

Архангельск (8182)63-90-72 **Калининград** (4012)72-03-81 **Новосибирск** (383)227-86-73 **Сочи** (862)225-72-31
Астана +7(7172)727-132 **Калуга** (4842)92-23-67 **Омск** (3812)21-46-40 **Ставрополь** (8652)20-65-13
Астрахань (8512)99-46-04 **Кемерово** (3842)65-04-62 **Орел** (4862)44-53-42 **Сургут** (3462)77-98-35
Барнаул (3852)73-04-60 **Киров** (8332)68-02-04 **Оренбург** (3532)37-68-04 **Тверь** (4822)63-31-35
Белгород (4722)40-23-64 **Краснодар** (861)203-40-90 **Пенза** (8412)22-31-16 **Томск** (3822)98-41-53
Брянск (4832)59-03-52 **Красноярск** (391)204-63-61 **Пермь** (342)205-81-47 **Тула** (4872)74-02-29
Владивосток (423)249-28-31 **Курск** (4712)77-13-04 **Ростов-на-Дону** (863)308-18-15 **Тюмень** (3452)66-21-18
Волгоград (844)278-03-48 **Липецк** (4742)52-20-81 **Рязань** (4912)46-61-64 **Ульяновск** (8422)24-23-59
Вологда (8172)26-41-59 **Магнитогорск** (3519)55-03-13 **Самара** (846)206-03-16 **Уфа** (347)22948 -12
Воронеж (473)204-51-73 **Москва** (495)268-04-70 **Санкт-Петербург** (812)309-46-40 **Хабаровск** (4212)92-98-04
Екатеринбург (343)384-55-89 **Мурманск** (8152)59-64-93 **Саратов** (845)249-38-78 **Челябинск** (351)202-03-61
Иваново (4932)77-34-06 **Набережные Челны** (8552)20-53-41 **Севастополь** (8692)22-31-93 **Череповец** (8202)49-02-64
Ижевск (3412)26-03-58 **Нижний Новгород** (831)429-08-12 **Симферополь** (3652)67-13-56 **Ярославль** (4852)69-52-93
Казань (843)206-01-48 **Новокузнецк** (3843)20-46-81 **Смоленск** (4812)29-41-54

Единый адрес для всех регионов: ccr@nt-rt.ru || www.cbi-electric.nt-rt.ru